


**YKK
AP**®

Commercial
Standard Entrance
Hardware

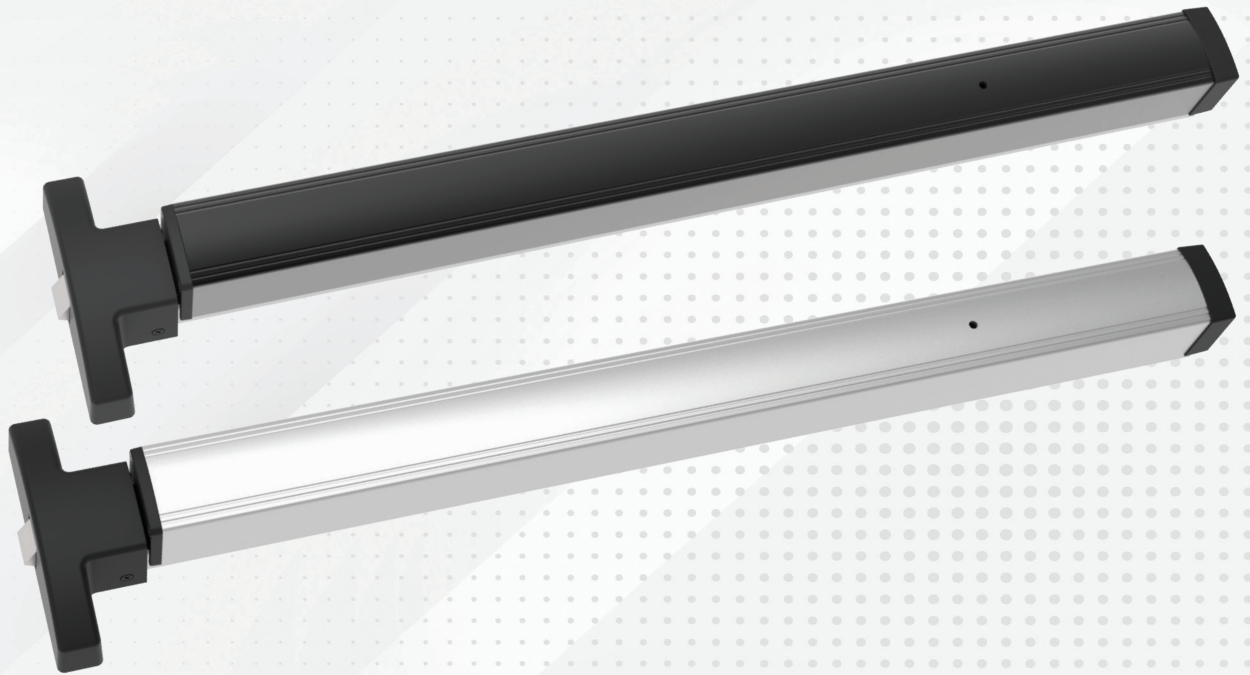

Description

- Rim Panic Device has latch bolt in rim of active housing engaging adjustable roller strike to provide locking action.
- Depressing touchpad “unlocks” the device and permits egress. The bolt re-engages the strike and locks when the door closes.
- On single doors, adjustable strike is mounted on frame lockjamb. Strike is part of removable mullion required for door pairs.
- Panic device can be deactivated or “dogged” with optional cylinder key or allen key in active housing. Keyed alike cylinders are optional. Rim cylinder diameter of 1-5/32” (29.4mm).

Compatible Entrances

20D/35D/50D, 40M/50M, 25T/35T/50T,
35XT/50XT & 25FD

Material Composition

- Aluminum Push Bar, Channel and End Caps
- Stainless Steel Strikes
- Steel Latch Bolts and Vertical Rods

Finishes

Coated Finish: 628 Clear or 335 Black

Other finishes available on special order

Application

- Depressing touchpad permits egress from building without key.
- Removable mullion is required on pairs of doors. Using optional mullion stabilizers is recommended.
- Touchpad design offers increased building security and reduces the risk of code infringements.

Hardware Vendor



Vendor Part or Series

First Choice 3790 Series

21-5012-00

P-54453

Standard Rim Panic Exit Device