


**YKK
AP**

Commercial
Standard Entrance
Hardware

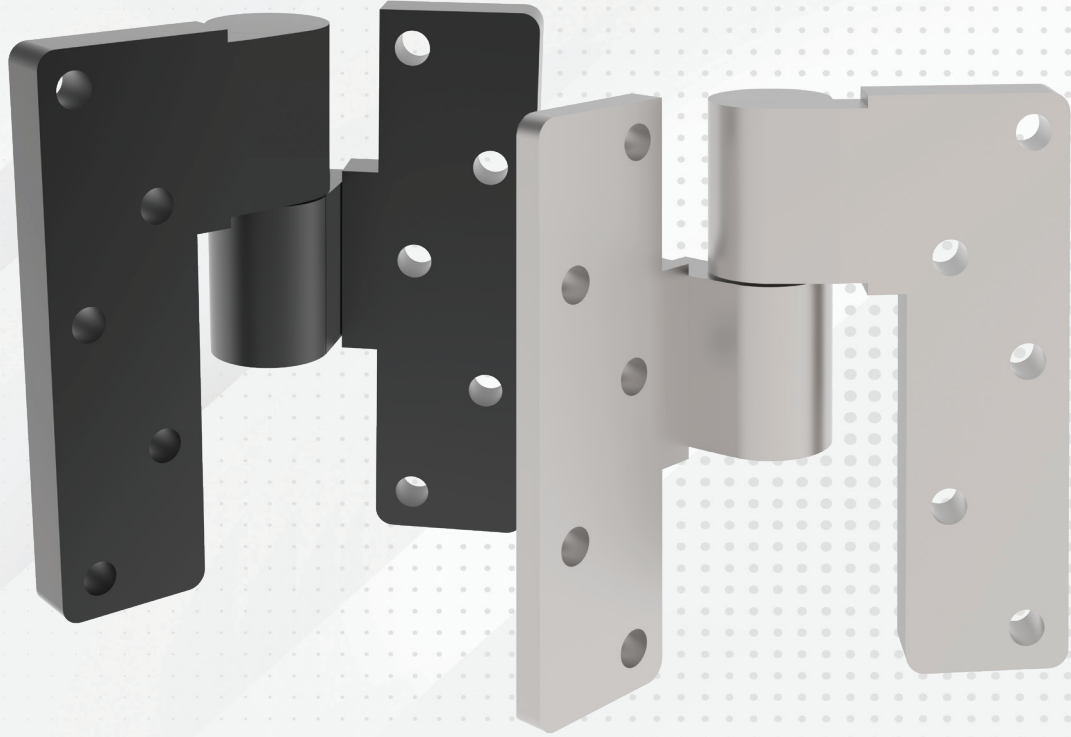

Description

- Aluminum pivot is fully mortised into door and frame with 3/4" offset from door face.
- Full race ball bearing and oilite bushing; bearing is corrosion resistant and self lubricating. Pin fully retractable for ease of installation and vertical adjustment.

Application

- Use in conjunction with offset pivot package for additional strength and door/frame alignment.
- Use on doors experiencing high traffic volume or on doors exceeding 7'-6" high. Doors over 7'-6" require intermediate pivot.
- Intermediate pivot can be specified for doors up to 7'-0" height.
- Intermediate pivots are an additional cost item.

NOTE: Maximum door weight for pivots is 125lbs

YKK AP Part Numbers

H-2201: Right Hand (RH) Pivot Package
H-2202: Left Hand (LH) Pivot Package

Compatible Entrances

20D/35D/50D, 35XT/50XT & 35HL/50HL

Material Composition

Aluminum with Stainless Steel Pin

Finishes

Baked Epoxy: 628 Clear or 335 Black

Hardware Vendor

RYADON

 A OneMonroe Company

Vendor Part or Series

Ryadon P120101 (Right Hand)
Ryadon P120102 (Left Hand)

21-5015-00

H-2201 / H-2202

Standard Intermediate Offset Pivot Package