



www.ykkap.com



Rowes Wharf Offices - Boston, MA

YES 20


Sash Storefront System for Monolithic or Insulating Glass

The **YES 20** is a basic sash type storefront that supports both monolithic and insulating glass. It can be center or flush glazed per project specifications. It is ideal for interior use that has minimal temperature changes. This system has longer horizontal mullions which results in greater spans for projects. With easy setup and installation, this system is ideal for office or interior store settings. The glass size can be a variety of thicknesses as small as 3/16" all the way up to 1".

- Stretch-resistant cord in our gaskets securely holds glass in place
- Anchored and then installed using sash stops to attach glass to the frame
- Assemble units quickly and easily

Configuration:

Glazing	Glass Setting	Installation
Outside	Center or Flush Set	Sash Stops

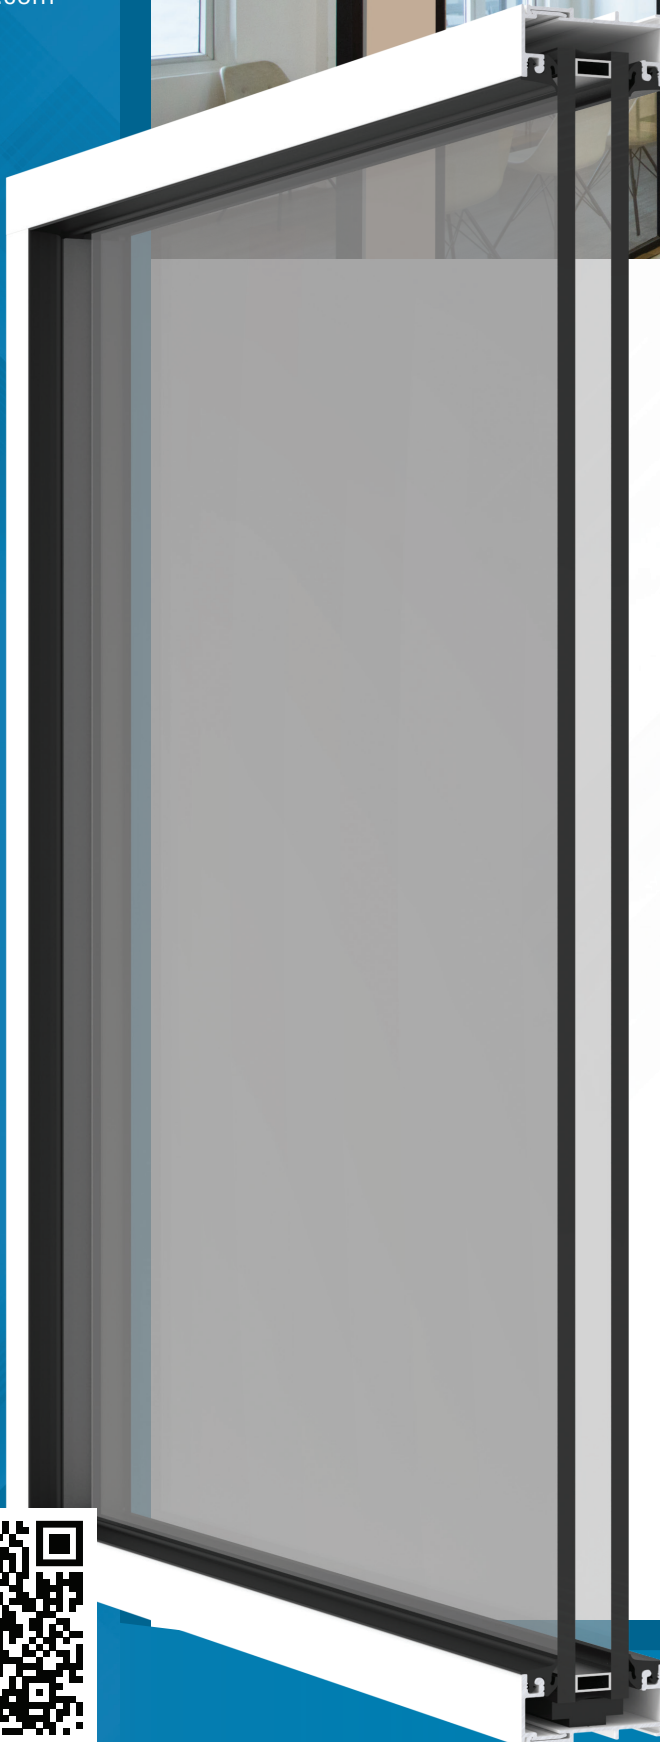


YES 20 SPECS		
Base Depth	4-1/2"	
Sightline	2"	
Config	Outside Glazed / Center or Flush Set	
Tested Glass	1" IGU with Low-E (C.O.G. U-Factor: 0.29)	
Test	Results	Standards
Air Infiltration	0.06 CFM/FT ² (1.10 m ³ /h·m ²) @ 6.24 PSF (299 Pa)	ASTM E 283

Finish Options	
Type	Standard
Factory Anodized	AAMA 612
Organic Paints	AAMA 2604 AAMA 2605

Glass Sizes Supported
Center: 3/16", 1/4", 5/16", 3/8", 1/2", 5/8", 3/4", 7/8" and 1"
Flush: 3/16", 1/4", 5/16" and 3/8"

Glazing Details

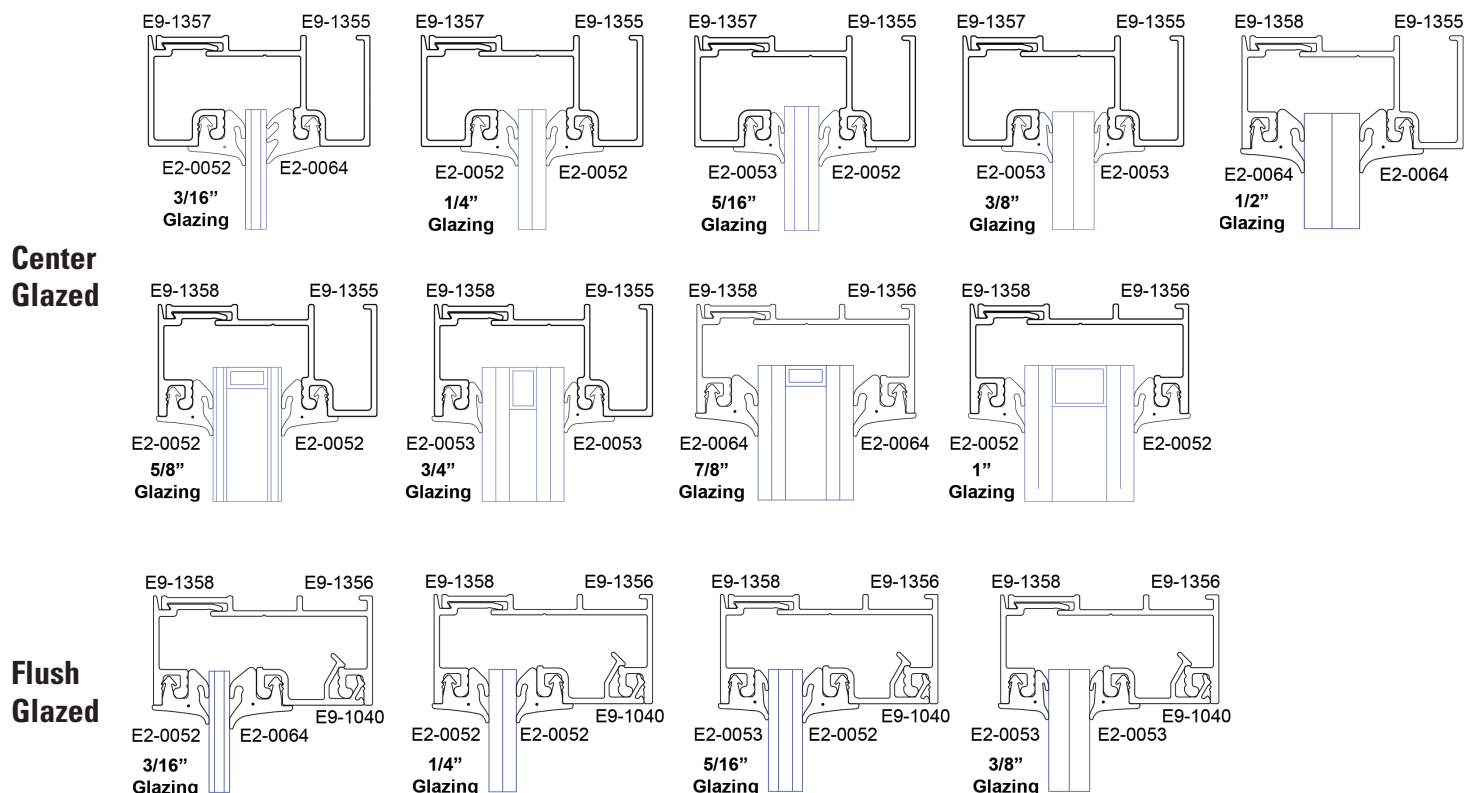

Sash Glass Stop Attachment

In lieu of using any shear blocks or screw splines to attach mullions, this system utilizes a sash glass stop attachment in the front that snaps into the head and sill, securing the glass in place. Since this system is ideal for interior environments, structural considerations are less, allowing for easier and faster installation.



Additional information including CAD details, CSI specs, test reports and installation instructions are found on the Product Guide by clicking this link or visiting www.ykkap.com/commercial/productguide